



MURPHY®

POWerview™  
25

# COMPACT ENGINE PARAMETER AND DIAGNOSTIC DISPLAY



Displays Up to 20 Standard Engine Parameters

Supports SAE J1939 Protocol

Visual Alarm Indication with Warning and Shutdown

Displays Active DM1 and Stored DM2 Fault Messages

Simple Installation and Rugged Design

Tier 4/Stage IIIB/IV Compliant



Murphy's PowerView 25 display integrates valuable electronic engine parameter data into a compact and economical design suitable for rugged environments as well as in-cab applications.


The PV25 features two push buttons for quick access to diagnostic fault code data, and a back-lit graphic display along with two alarm indication LEDs for enhanced visibility and alarm notification.

The PV25 diagnostic features save operational costs by displaying active and stored fault messages identified by the Suspect Parameter Number (SPN), Failure Mode Indicator (FMI) and the Occurrence Count (OC).


Typical engine parameters include engine RPM, engine hours, oil pressure, coolant temperature, system voltage, percent load at RPM and more.

# POWerview™ 25


## STANDARD DIMENSIONS

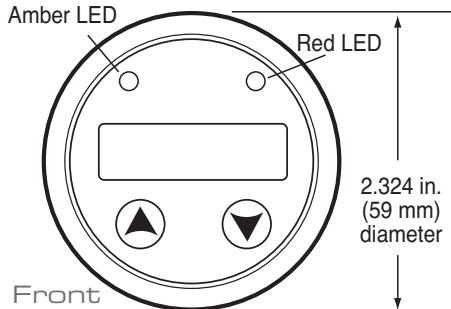

Front

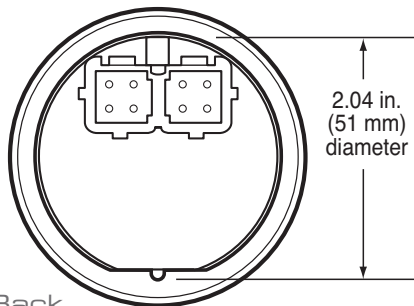

Back

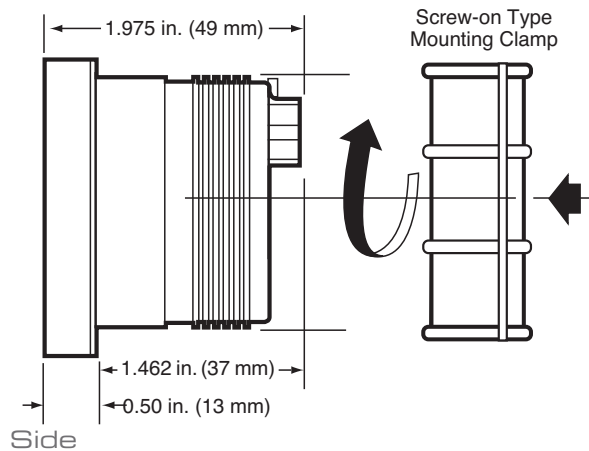

Side

## TECHNICAL SPECS:

- Supported CAN Messages:
  - Engine Speed
  - Engine Oil Pressure
  - Engine Coolant Temperature
  - Voltage
  - Battery Potential (Switched)
  - Total Engine Hours
  - Machine hours
  - Percent Load at Current RPM
  - Total Fuel Used
  - Average Fuel Economy
  - Trip Fuel
  - Engine Oil Temperature
  - Exhaust Gas Temperature
  - Air Filter Differential Pressure

*The following are available for Tier 4 applications:*

- Percent Soot
- Catalyst Temperature
- Percent Ash
- Exhaust Filter Outlet Temp
- Exhaust Filter Inlet Temp
- Catalyst Tank Level
- Operating Voltage: 6 – 36 VDC
- Power Supply Operating Current: 460mA max @12 VDC; 810mA max @ 24 VDC
- Reversed Polarity: Withstands reversed battery terminal polarity
- CAN Bus: SAE J1939 Compliant
- Connectors: 4-pin AMP "Mini-universal Mate-N-Lok Connector"
- Standard Gage Hole Cut-Out: 2 inch [51 mm]
- Maximum Panel Thickness: 3/8 inch [9.6 mm]
- Shipping Weight (all models): 0.2 lb [100 g]
- Shipping Dimensions (all models): 3.875 x 2.75 x 2.75 in. [98.4 x 69.85 x 69.85 mm]

## ENVIRONMENTAL SPECS:

- Operating Temperature: -40° to 70°C [-40° to 158°F]
- Storage Temperature: -55° to 85°C [-67° to 185°F]
- Sealing: IP68

### FW MURPHY

5311 South 122nd East Avenue  
Tulsa, Oklahoma 74146 USA  
Phone: +1 918 317 4100 Fax: +1 918 317 4266  
E-mail: sales@fwmurphy.com  
Website: www.fwmurphy.com

### ECONTROLS, INC

5757 Farinon Drive  
San Antonio, Texas 78249 USA  
Phone: +1 210 495 9772 Fax: +1 210 495 9791  
E-mail: info@econtrols.com  
Website: www.econtrols.com

### FWM INDUSTRIAL PANEL DIVISION

5311 South 122nd East Avenue  
Tulsa, Oklahoma 74146 USA  
Phone: +1 918 317 4100 Fax: +1 918 317 4124  
E-mail: ipdsales@fwmurphy.com  
Website: www.fwmurphy.com

### FRANK W. MURPHY, LTD

Church Rd Laverstock  
Salisbury SP1 1QZ UK  
Phone: +44 1722 410055 Fax: +44 1722 410088  
E-mail: sales@fwmurphy.co.uk  
Website: www.fwmurphy.co.uk

### FW MURPHY INSTRUMENTS (HANGZHOU) CO. LTD

77 23rd Street  
Hangzhou Economic & Technological Development Area  
Hangzhou, Zhejiang 310018 China  
Phone: +86 571 8788 6060 Fax: +86 571 8684 8878  
E-mail: apsales@fwmurphy.com  
Website: www.fwmurphy.com/company\_ch

### FW MURPHY (LATIN AMERICA & CARIBBEAN)

Apdo. Postal 2-06, Admon. "Lomas" Cord. Arakán 606-16  
Lomas 4th Sección 78211, San Luis Potosí, S.L.P., México  
Phone: +1 918 317-2500  
E-mail: lasales@fwmurphy.com  
Website: www.fwmurphy.com

### FW MURPHY INDIA

Maharashtra State, India  
Phone: +91 91581 37633  
E-mail: indiasales@fwmurphy.com  
Web: www.fwmurphy.com

### COMPUTRONIC CONTROLS, LTD

Phone: +44 1722 410055 Fax: +44 1722 410088  
E-mail: sales@computroniccontrols.com  
Website: www.computroniccontrols.com



USA-ISO 9001:2008 FM 28221  
UK-ISO 9001:2008 FM 29422  
CHINA-ISO 9001:2008 FM 52385  
Registered Facilities

