

# Pressure Transmitters PXT Series



## Features

- 4-20 mA Output Signal
- Precision Etched Silicon Sensor
- Corrosion Resistant Construction
- High Stability



The PXT Series pressure transmitter is a state-of-the-art instruments providing 4 to 20 mA outputs. It features a precision micro-machined silicon diaphragm with fully welded stainless steel pressure port for greater accuracy, stability and a wide range of compatibility.

Silicon technology is used to provide a miniature micro-machined diaphragm which is electrostatically bonded to a glass substrate and is then stitch-bonded within a glass to metal seal assembly to provide exceptional thermal and stress isolation. This technology assures you of high accuracy and stability over a wide range of operating conditions.

The enclosure is made of 316 stainless steel and all wetted parts are 316L stainless steel or HASTELLOY C276.

## Applications

The PXT can be used in applications such as Compressors, Engines, Process Control, Liquid Level and Pumps.

## Specifications

### Accuracy (Full Scale, Best Straight Line):

±0.25% including non-linearity, hysteresis and repeatability. Long term stability better than 0.2% FS over twelve (12) months.

**Zero Setting:** ±0.5% of full scale (0.25% typical).

**Span Setting:** ±0.5% of full scale BSL (RSS).

**Overpressure/Proof Pressure:** 400% for up to 500 psi (3.45 MPa) [34 Bar]. 200% for higher ranges.

**Burst Pressure:** Ranges 0-1000 psi = 600% of full scale or 4000 psi whichever is lower. Ranges 2000 psi [137 Bar] = 20,000 psi (27.5 MPa) [275 Bar].

**Response Time:** Frequency response better than 2 kHz.

**Storage Temperature:** -65 to 200°F (-54 to 93°C).

**Operating Temperature:** -40 to 180°F (-40 to 82°C).

**Compensated Temperature:** -20 to 160°F (-29 to 71°C).

**Total Thermal Effects Over Compensated Range:** ±2% FS TEB.

### Physical:

Enclosure: Weather Resistant.

Body: 316 stainless steel. Meets NACE MR01-75.

Wetted Parts: 316L stainless steel or HASTELLOY C276.

Process Connection: 1/4 NPT female.

Electrical Cable: Integral; 60 in. (914 mm); vented. 1/2 in. NPT male conduit connection

### Environmental Effect:

Humidity: No effect.

Mounting: Position/orientation has negligible effect.

Reverse polarity protected

**Shock:** 1000g 1ms Half sine Pulse in each of 3 mutually perpendicular axis will not affect performance.

**Vibration:** Effect on output response is less than 0.05% FS/g at 30g Peak 10Hz to 2kHz, limited by 0.05 in double amplitude. (MIL STD 810C Proc. 514.2-2 curve L). PXT Power Requirements: Typically 24 VDC is required, using the Loop Resistance Graph, 9-30 VDC.

**PXT Series Transmitter Output:** 4–20 mA, 2-wire.

**Insulation:** Greater than 10 Mohms @ 500 VDC.

**RFI Protection:** To the European standards of BS EN 50082-2:1991 in accordance with IEC 801 parts 1 to 6 for susceptibility to EMC and to BS EN 50081-1992 for emissions.

**Voltage Surge/Spike:** Protected against a 600 V spike to IEC 60-2. Reverse polarity protected.

**Sealed:** Sealed at one atmosphere at sea level for ranges > 1000 psi (6.89 MPa) [68 Bar].

**Vented:** Vented for ranges ≤ 1000 psi (6.89 MPa) [68 Bar].


**UL Certification:** Class I, Division 2, Groups A, B, C and D; Class II, Groups E, F and G. Pressure transmitter, Model PXT. Intrinsically safe when installed per system, Diagram No. 05-08-0754. UL File #E169675

**Shipping Weight:** 0.90 lb. (408 g).


**Shipping Dimensions:** 5 x 5 x 5 inches (127 x 127 x 127 mm).

## Product Dimensions

### Low Pressure Units

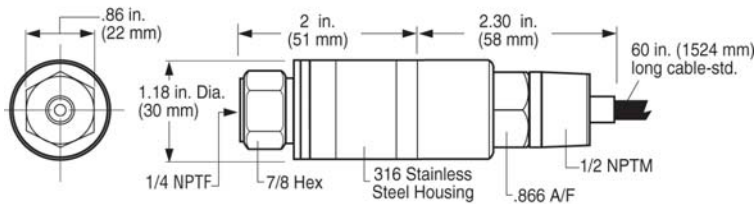


### High Pressure Units

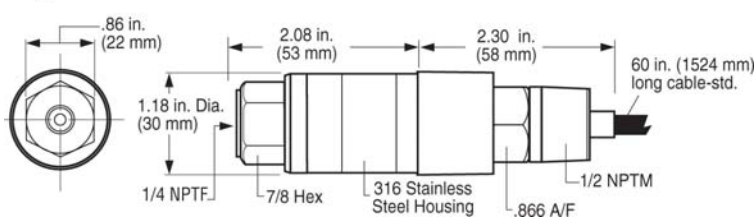

## Loop Resistance Graph

Supply voltage for the PXT must be within range of 9-30 VDC. The graph below shows the minimum supply voltage (VDC) required for a given load resistance (RL).

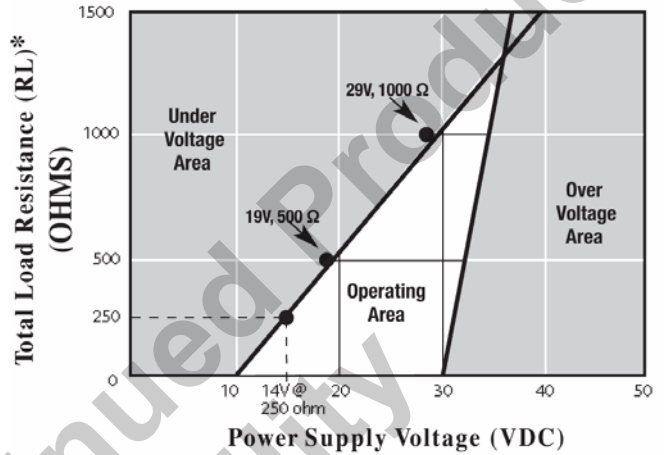

\*NOTE: Cable resistance effect included in RL.

## How to Order

Model  
PXT =

### Pressure Range†:

Specify For this range

30V30WC	-30" H2O to +30" H2O (-76 cm H2O to +76 cm H2O)	[+/-0.075 Bar]
30V30	-30" Hg to +30 psig (-76 cm Hg to 207 kPa)	[2.07 Bar]
30V100	-30" Hg to +100 psig (-76 cm Hg to 689 kPa)	[6.89 Bar]
15	0-15 psi (103.4 kPa)	[1.03 Bar]
60	0-60 psi (413.7 kPa)	[4.13 Bar]
100	0-100 psi (689 kPa)	[6.89 Bar]
200	0-200 psi (1.38 kPa)	[13.78 Bar]
300	0-300 psi (2.07 kPa)	[20.67 Bar]
400	0-400 psi (2.75 MPa)	[27.56 Bar]
600	0-600 psi (4.14 kPa)	[41.34 Bar]
1000	0-1,000 psi (6.89 MPa)	[68.9 Bar]
2000	0-2,000 psi (13.79 MPa)	[137.8 Bar]
3000	0-3,000 psi (20.69 MPa)	[206.7 Bar]
5000	0-5,000 psi (34.48 MPa)	[344.5 Bar]
6000	0-6,000 psi (41.37 MPa)	[413.4 Bar]

†NOTE: Conversions are approximate.

To order, use the model number designation **PXT**, and then add the Pressure Range.


For example: **PXT-100**

**Warranty** - A limited warranty on materials and workmanship is given with this FW Murphy product. A copy of the warranty may be viewed or printed by going to <http://www.fwmurphy.com/warranty>

## PXT and PXT-K Series Pressure Transmitter Cabling Identification

The PXT Series Pressure Transmitters have been changed. Previous pressure transmitters in this series were identified as **PXT Pressure Transmitters**. The newest version is the **PXT-K Series Pressure Transmitters**. Identification of electrical cable color is NOT interchangeable between the two series of pressure transmitters.

This document contains information to assist you in identifying the pressure transmitter unit you have and the correct electrical cable colors to avoid wiring mistakes.

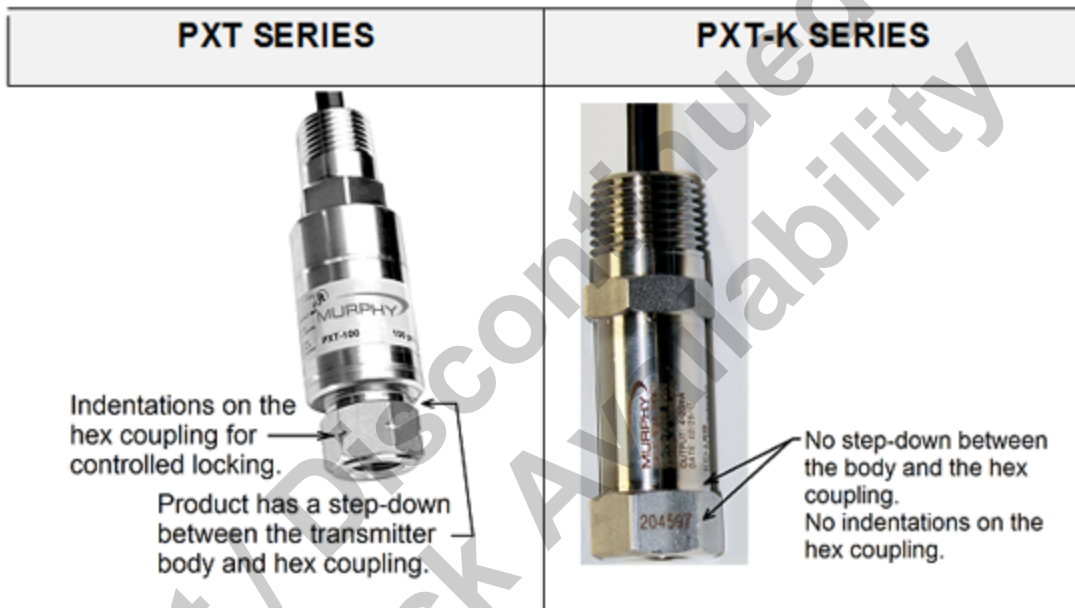

Cable Color	Connection	Cable Color	Connection
RED	POWER	RED	POWER
BLUE	SIGNAL	BLUE	N/A
BLACK	CASE GROUND	BLACK	SIGNAL
ORANGE, YELLOW, WHITE	N/A	ORANGE, YELLOW, WHITE	N/A
Installation Instructions	00-02-0475	Installation Manual	00-02-0840
Installation Diagram	05-08-0754	Installation Diagram	05-08-0763

Phase-out / Discontinued Product  
Check Availability

**FW MURPHY**

5311 South 122<sup>nd</sup> East Avenue  
Tulsa, Oklahoma 74146 USA  
Phone: +1 918 317 4100 Fax: +1 918 317 4266  
E-mail: sales@fwmurphy.com  
Website: www.fwmurphy.com

**ECONTROLS, INC.**

5757 Farinon Drive  
San Antonio, Texas 78249 USA  
Phone: +1 210 495 9772 Fax: +1 210 495 9791  
E-mail: info@econtrols.com  
Website: www.econtrols.com

**CONTROL SYSTEMS & SERVICES DIVISION**

105 Randon Dyer Road  
Rosenberg, Texas 77471 USA  
Phone: +1 281 633 4500 Fax: +1 281 633 4588  
E-mail: css-solutions@fwmurphy.com  
Website: www.fwmurphy.com

**FRANK W. MURPHY, LTD.**

Church Road, Laverstock  
Salisbury, SP1 1GZ, UK  
Phone: +44 1722 410055 Fax: +44 1722 410088  
E-mail: sales@fwmurphy.co.uk  
Website: www.fwmurphy.co.uk

**FW MURPHY INSTRUMENTS (HANGZHOU) CO., LTD.**

77 23rd Street  
Hangzhou Economic & Technological Development Area  
Hangzhou, Zhejiang, 310018, China  
Phone: +86 571 8788 6060 Fax: +86 571 8684 8878  
E-mail: apsales@fwmurphy.com  
Website: www.fwmurphy.com/company\_ch

**FW MURPHY (LATIN AMERICA & CARIBBEAN)**

Apdo. Postal 2-06, Admon "Lomas"  
Cord. Anakán 606-16, Lomas 4<sup>o</sup> Secc.  
78211 San Luis Potosí, S.L.P. – México  
Phone: +1 918 317 2500  
E-mail: lasales@fwmurphy.com  
Website: www.fwmurphy.com

**FW MURPHY (INDIA)**

230, Regus, Connaught Place Centre  
Bund Garden Road, Pune 411001  
Maharashtra State, India  
Phone: +91 915 813 7633  
E-mail: indiasales@fwmurphy.com  
Website: www.fwmurphy.com



USA-ISO 9001:2008 FM 28221  
UK-ISO 9001:2008 FM 29422  
CHINA-ISO 9001:2008 FM 523851  
Registered Facilities



www.fwmurphy.com